

**Analysis and simulation of the relative intensity noise in
a Fabry-Perot interband cascade laser highlights
relaxation oscillations around GHz**

O Spitz, A Herdt, J Wu, G Maisons, M Carras, C.-W Wong, W Elsässer, F
Grillot

► **To cite this version:**

O Spitz, A Herdt, J Wu, G Maisons, M Carras, et al.. Analysis and simulation of the relative intensity noise in a Fabry-Perot interband cascade laser highlights relaxation oscillations around GHz. MIOMD, 2021, Surrey, United Kingdom. hal-03363359

HAL Id: hal-03363359

<https://hal.telecom-paris.fr/hal-03363359>

Submitted on 3 Oct 2021

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Public Domain

Application of chaos synchronization in injected mid-infrared quantum cascade lasers for private free-space communication

O. Spitz^{1,2*}, A. Herdt³, J. Wu^{4,5}, G. Maisons², M. Carras², C.-W. Wong⁴, W. Elsässer³, F. Grillot^{1,6}

¹LTCl, Institut Polytechnique de Paris, 19 place Marguerite Perey, 91120 Palaiseau, France

²mirSense, Centre d'intégration NanoInnov, 8 avenue de la Vauve, 91120 Palaiseau, France

³Technische Universität Darmstadt, Schlossgartenstrasse 7, D-64289 Darmstadt, Germany

⁴Fang Lu Mesoscopic Optics and Quantum Electronics Laboratory, UCLA, CA 90095, USA

⁵College of Electronic and Information Engineering, Southwest University, Chongqing, China 400715

⁶Center for High Technology Materials, University of New-Mexico, Albuquerque, NM, USA

*Email: olivier.spitz@telecom-paris.fr

Free Space Optics (FSO) is a growing technology offering fast and cost-effective deployment compared to fiber technology. Chaos-based transmissions [1] in FSO are fundamentally restricted by atmospheric phenomena. Thus, the operating wavelength is a key parameter that has to be chosen wisely to reduce the impact of the environment. In this context, QCLs are relevant semiconductor lasers because their optical wavelength lies within the mid-infrared domain where the atmosphere is highly transparent [2]. The simplest way to generate a chaotic optical carrier from a QCL is to reinject part of its emitted light back into the laser's cavity after reflection on a distant mirror [3]. The QCL that is driven chaotic is called the master QCL and the small-amplitude message to be transmitted is added to the chaotic waveform, thus hindering simple extraction for an eavesdropper. The master's signal is transmitted free-space toward a second QCL, called slave laser, which resembles the properties (wavelength, carrier lifetime, linewidth enhancement factor) of the master laser. Because of chaos synchronization, the slave QCL reproduces the chaotic waveform of the master QCL but not the hidden message. Subtraction of the master's signal by the slave's signal allows recovering the private message. Figure 1 (a) illustrates the quality of the synchronization between the master QCL and the slave QCL. Figure 1 (b) shows that the difference signal, in purple, reproduces the bit pattern of the initial encoded message, in green, while the master and the slave signals, in red and blue respectively, do not give any indication about the transmitted sequence hidden in the red signal.

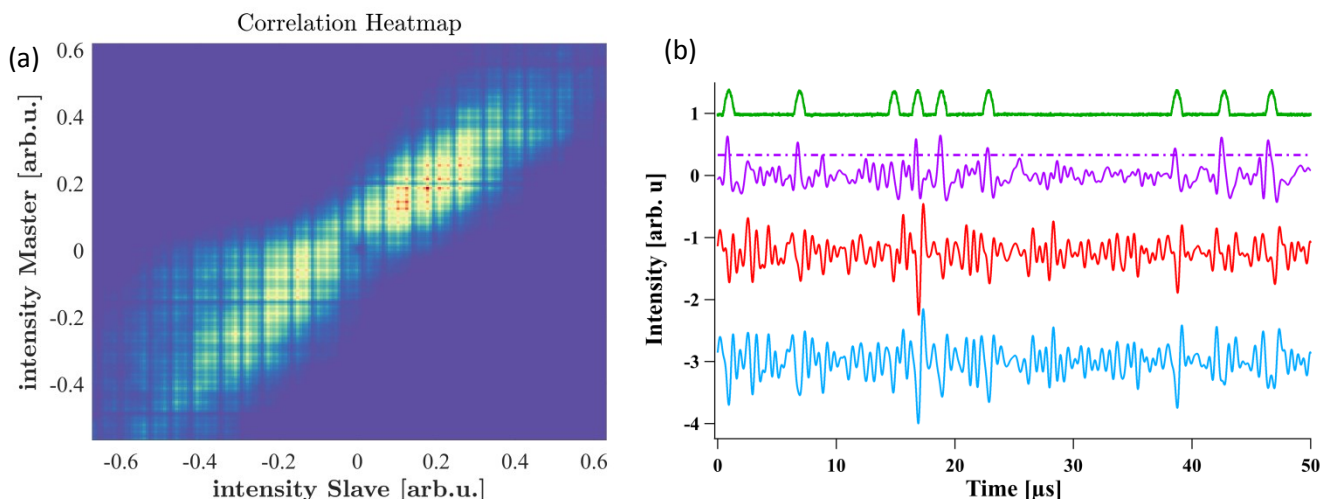


Figure 1. (a) Intensity correlation between the master QCL and the slave QCL, showing high-quality synchronization; (b) Recovery process after blue signal is synchronized with red signal, containing message and chaos. The difference signal in purple reproduces with acceptable fidelity the bits of the green sequence (strongly magnified in this example) that was initially concealed in the red signal.

References

- [1] A. Argyris et al., *Nature*, vol. 438, 343-346 (2005)
- [2] P. Corrigan et al., *Optics Express*, vol. 17, 4355-4359 (2009)
- [3] L. Jumpertz et al., *Light: Science & Applications*, vol. 5, e16088 (2016)